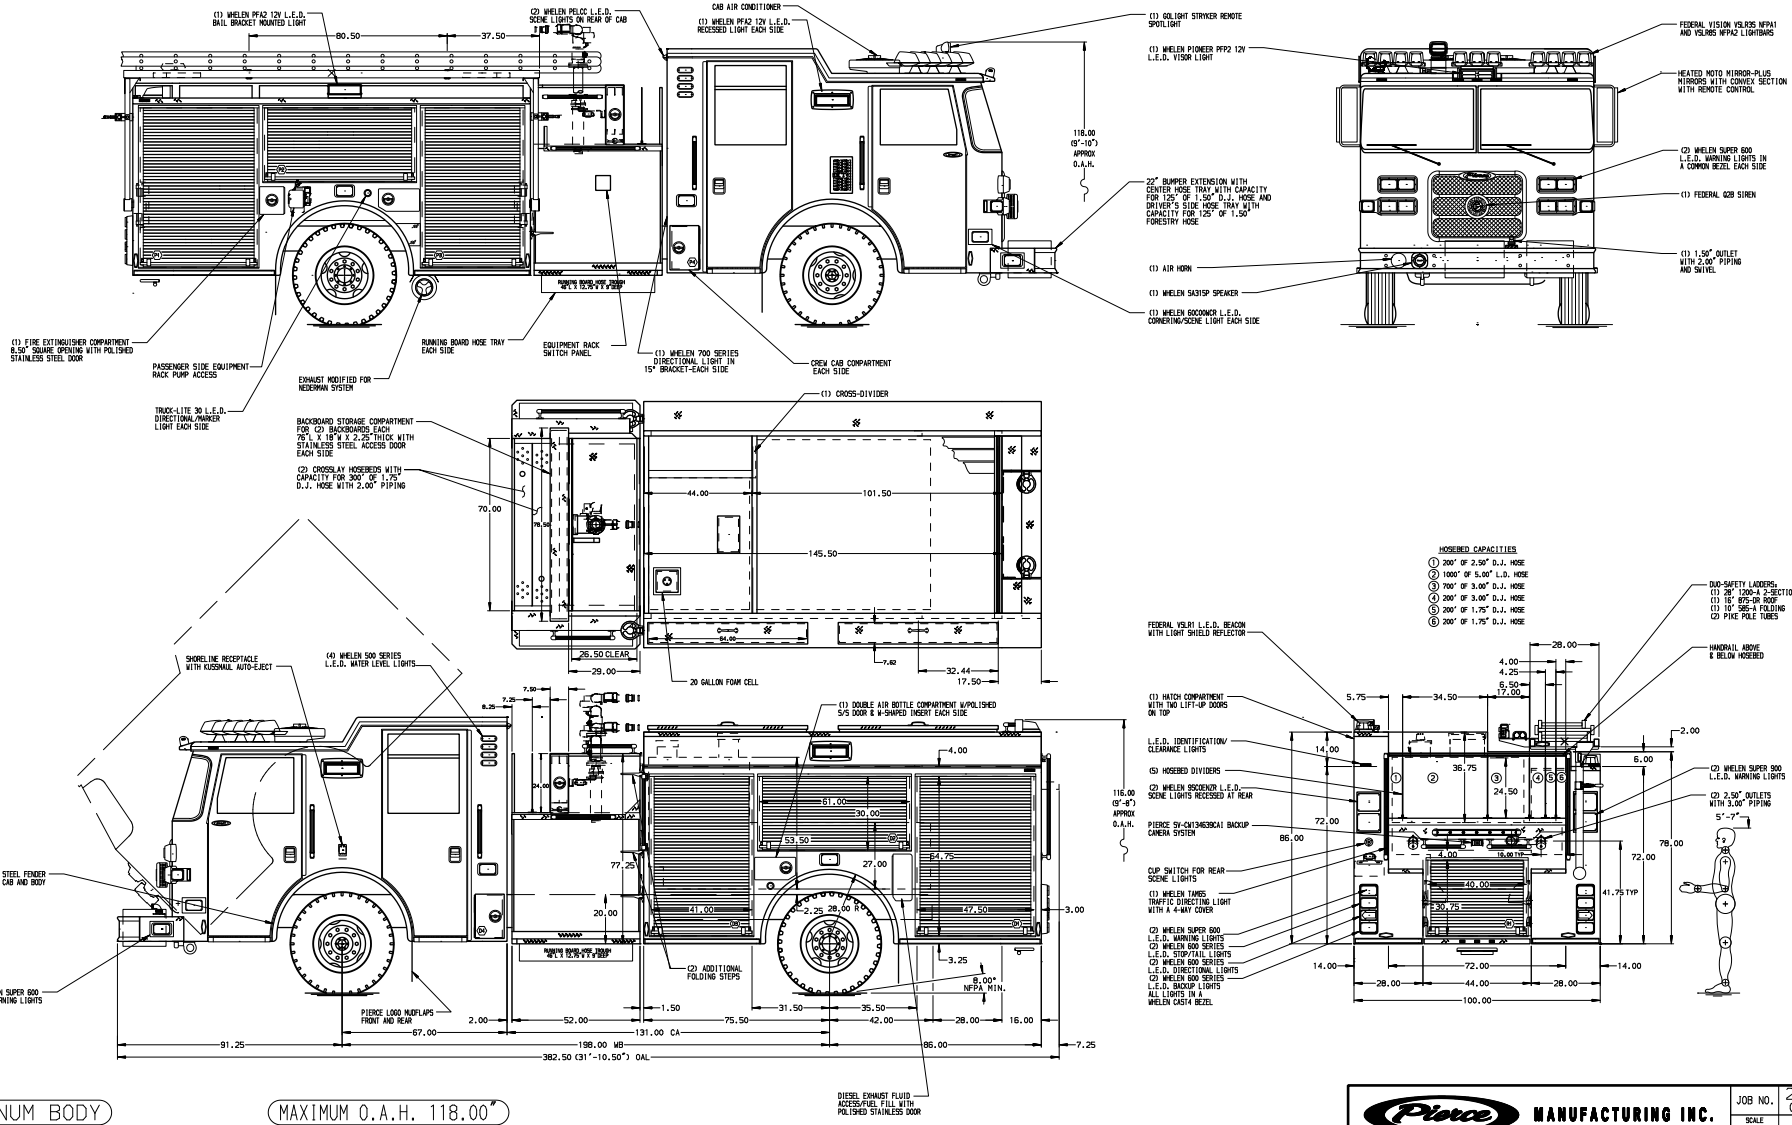

ALUMINUM BODY

MAXIMUM O.A.H. 118.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

NOTES:
1. ONSPOT EXTREME DUTY AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. CTF WHEEL CHOCKS AND MOUNTING BRACKETS
3. ALUMINUM TREADPLATE EXTERIOR REAR WALL OF CAB
4. ALUMINUM 4-WAY ON CREW CAB ROOF
5. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
6. BATTERY CHARGER/AIR COMPRESSOR LOCATED ABOVE D3
7. BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BREAKER
8. L.E.D. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
9. STAINLESS STEELS DRIP PANS FOR ROLL UP DOORS IN SIDE BODY COMPARTMENTS
10. PIERCE L.E.D. DUAL COMPARTMENT LIGHT STRIPS LOCATED PER SHOP ORDER
11. PAINTED SHELF TRACKS LOCATED IN EACH BODY COMPARTMENT
12. ONE FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELF IN COMPARTMENTS P3 & R1, TWO EACH IN P1, D3 D1 & D2
13. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENTS P3 REAR OF PARTITION
14. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENT P2
15. PARTITION BETWEEN COMPARTMENTS D1/R1 AND P1/R1
16. ONE VERTICAL PARTITION IN COMPARTMENT P3
17. ALL FOLDING STEPS TO BE TRIDENT WITH INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
18. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
19. ONE STRAIGHT BLADE DUPLEX RECEPTACLE LOCATED IN D3
20. AIR OUTLET WITH DISCONNECT FITTING LOCATED ON D5 PUMP PANEL
21. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED IN COMPARTMENT D1, D3, P1, P3 & R1

REV	DATE	BY	CH	
V	13NOV14	BZI	PJP	CHASSIS DATA
V	14OCT14	BZI	CTR	MAKE
V	10OCT14	BZI	JTH	PIERCE
V	18AUG14	BZI	TH1	MODEL
				ARROW XT

Pierce MANUFACTURING INC.

TITLE: 1500-D-750P 730 GAL WATER, 20 GAL FOAM, 161 BODY FH & D FRONT DS, FH PS, FDLER, HYD EQUIP RACK

FOR: COBB COUNTY FIRE DEPARTMENT MARIETTA, GA

DWG NO. 28188AD

JOB NO.	28188 01-04
SCALE	1:24
DATE	
DRAWN BY	BZI 15AUG14
CHECKED BY	CTR 16AUG14
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 21-NOV-2014 13:16:21